




Push-in terminal block 4mm² fuse-holder, 1-level, blue color

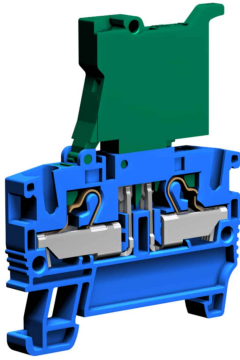

Series	EFF
Code	EFF400BL
Type	EFF.4/BL
HS code	85369010
Colour	Blue
TECHNICAL FEATURES	
Function/Type	Fuse-holder 5x20
Rated cross-section	4 mm ²
Connecting capacity	
Flexible wire	0.2-6 mm ²
Rigid wire	0.2-6 mm ²
Wire with ferrule - ferrule type	4 mm ² - WP40/16
Characteristics according to European standard IEC EN 60947-7-1 / 60947-7-3	
Maximum voltage AC/DC	630 V
Maximum current (rated cross-section)	6.3 A (1)
Caliber	A4
Characteristics according to UL	
Maximum voltage AC/DC	600 V (UG D) - 300 V (UG B,C)
Maximum current (rated cross-section)	6.3 A (1)
Section (min-max)	24-10 (AWG)
Characteristics according to ATEX directive and IEC ex standard	
Maximum voltage AC/DC	-
Maximum current (rated cross-section)	-
Service temperature Min/Max	-
Rated impulse withstand voltage / pollution degree	4 kV / 3
Insulation stripping length	10 mm
Width (pitch)	6.2 mm
Length	55.2 mm
Height mounted on TH35-7.5/TH35-15/G32	67.1 / 74.6 / - mm
Insulation material temperature index (EN 60216-1)	130 °C
Plastic material	Polyamide UL94V-0
ACCESSORIES	
End section	
Grey	EFC.4/PT/GR (cod. EFC401GR)
Blue	EFC.4/PT/BL (cod. EFC401BL)
Thickness	1.5 mm
Cross-connection	EFB.4/.../... (cod. EFB04...)
Rated current carrying capacity IEC/ATEX	32 A
Coloured partition plate	DFE.1+1/R (cod. DFE01R)
Marking	
Single marking tag	CNU/8/51 (cod. NU0851S), CNU/10/51 (cod. NU1051S)
Single marking tag for pitch insertion	CNU/8/61 (cod. NU0861S), CNU/10/61 (cod. NU1061S)
Fuse type	5x20 mm (1)
Conductive element	CO/5 (cod. VL103)
Light alarm circuit (12...48 V)	CIL/12-24-48 (cod. CB518)
Light alarm circuit (110...230 V)	CIL/115-230 (cod. CB523)
End bracket	
TH35 screw type	BT/3 (cod. BT003)
TH35 snap-fit type	BT0 (cod. BT007)
TH35 and G32 snap-fit type	BTU (cod. BT005)
DIN rail according to IEC 60715/TH35	PR/3/..
APPROVALS AND MARKINGS	



- * Suitable for 5x20 mm fuses
- * Accessory with alarm LED, available separately
- * Accessory with 1 A or 3 A diode, available separately

1 For more details on accessories, refer to the relevant chapters
2 (1) Value limited by the certification rating of the fuse

PRODUCT DESCRIPTION

EFF.4/BL Push-in terminal block 4mm² fuse-holder, 1-level, blue color