





Cabur Solar fuse holder connector

Code	IS43430N
Type	KX04FMHN
HS code	85366990
TECHNICAL FEATURES	
Application	Fuse holder
Connector type	Fuse holder
Max. applicable voltage	1500 Vdc
Max. applicable current	30 (A)
PIN diameter	4 (mm)
Pliers to use	
PIN material	Tinned Copper
Insulation material	PPE / PA
Contact resistance Rc	< 0.25 (mΩ)
Operating temperature range	-40...+85 (°C)
Protection degree	IP68 (1m, 1h)
Flame class	UL94-V0
Packaging	50 (10 bags for every box, every single bag contains 5 connectors)
ACCESSORIES	
Open-end spanner and unlocking tool	
cod. unlocking tool	IS4SBLOCKN
Quantity / Package	2 pieces
Caps	
Male	IS52400N
Female	IS51400N
Operating temperature range	-40...+85
Protection degree	IP68 (1m, 1h)
Flame class	UL94-V0
Quantity / Package	50 pieces
SPARE COMPONENTS	
Plastic shell	
Metallic PIN wound on reel	
APPROVALS AND MARKINGS	

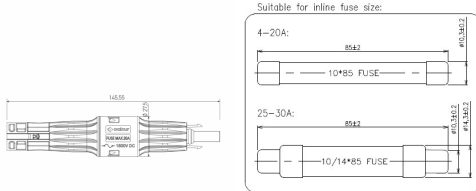

- 1 (1) Version produced upon request; contact our sales office for availability
- 2 (2) Sold without fuse.
- 3 (3) Connector suitable for c10x85 and 10/14x85 fuses.

PRODUCT DESCRIPTION

KX04FMHN Cabur Solar fuse holder connector