




Screw terminal block 6mm²
fuse-holder 6.3x32mm, 1-level, grey color

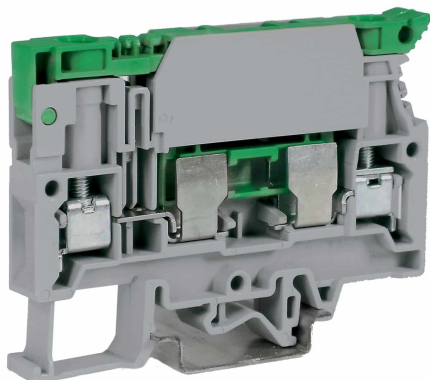

Type	SFR2M	SFR3L
Voltage (V)	250	250
Current (A)	6.3/10	2.5/10
	max.	max.
PROTECTION AGAINST OVERLOAD AND SHORT CIRCUIT		
Single configuration (A)	2.5W	4W
	configuration (A)	10W
Composite configuration (A)	2.5W	2.5W
	configuration (A)	10W
PROTECTION AGAINST SHORT CIRCUIT		
Single configuration (A)	4W (15A)	4W
	configuration (A)	10W
Composite configuration (A)	4W (15A)	4W
	configuration (A)	10W

Series	SFR – CBF
Code	SR300GR
Type	SFR.6/GR
HS code	85369010
Colour	grey
TECHNICAL FEATURES	
Function/Type	Fuse-holder 6.3x32 mm
Rated cross-section	6 mm ²
Connecting capacity	
Flexible wire	0.2-10 mm ²
Rigid wire	0.2-10 mm ²
Wire with ferrule - ferrule type	6 mm ² – WP60/20
Electrical characteristics according to IEC EN standard	
Maximum voltage AC/DC	630 V
Maximum current (rated cross-section)	10 A (32 A con C0/5) (1)
Caliber	A5
Electrical characteristics according to UL Standard	
Maximum voltage AC/DC	600 V
Maximum current (rated cross-section)	10 A
Section (min-max)	20-8 (AWG)
Tightening torque value (UL)	13 lb.in
Electrical characteristics according to ATEX directive and IEC Ex standard	
Rated impulse withstand voltage / pollution degree	6 kV / 3
Insulation stripping length	11 mm
Tightening torque value (nom. / max.)	0.8 / 1.4 Nm
Width (pitch)	10 mm
Length	79 mm
Height mounted on TH35-7.5/TH35-15/G32	59 / 67 / 63 mm
Insulation material temperature index (EN 60216-1)	130 °C
Plastic material	Polyamide UL94V-0
ACCESSORIES	
End section	
Grey	SFR.6/PT/GR (cod. SR301GR)
Blue	SFR.6/PT (Ex)i (cod. SR401)
Beige	SFR.6/PT (cod. SR301)
Thickness	1.5 mm
Cross-connection	
Model A)	PTC/20/... (cod. PTC20...)
Model B)	–
Rated current carrying capacity IEC/ATEX	25 A
Cross-connection identification strip	PTC/SP (cod. PTC0990)
Coloured partition plate	DFU/7/R (cod. DU07R)
Cross-connection barrier	DFM/300 (cod. DF300)
Test plug socket	SDD/1 (cod. DD001)
Test plug	SDD/1 (cod. DD001)
Marking	
Snap-on numbering strip	CNU/8/51 (cod. NU0851S) – CNU/10/61 (cod. NU1061S)
Single marking tag	–
Fuse type	6.3x32 mm (1)
Conductive element	C0/6 (cod. C006)
Light alarm circuit (12...48 V)	KITLSN/12-24 (cod. KIT1224)
Light alarm circuit (110...230 V)	–
End bracket	
TH35 screw type	BT/3 (cod. BT003)
TH35 snap-fit type	BT0 (cod. BT007)
TH35 and G32 snap-fit type	BTU (cod. BT005)
Mounting rail	
IEC 60715/TH35	PR/3/...
IEC 60715/G32	–
APPROVALS AND MARKINGS	



* Suitable for 6.3x32 mm fuses* Can be use as disconnecter, using the accessory, to be inserted in place of the fuse* Accessory with alarm LED, available separately* Fuse available separately* Possibilità di connessione in parallelo* Possibilità di connessione in parallelo
1 For more details on accessories, refer to the relevant chapters2 (1) 10 A with fuse or 32 A with CO/5

DESCRIZIONE DEL PRODOTTO

SFR.6/GR Screw
terminal block 6mm2 fuse-holder 6.3x32mm, 1-level, grey color