






1 solid state relay 12-24Vdc/24Vdc 4A spring, pluggable

Series	CWR
Code	X766822S
Type	CWS-024DC/024DC/04
HS code	85364190
INPUT TECHNICAL DATA	
Input rated voltage	24 Vdc ±10%
Pull in / drop out voltage type	19.2 V / 9 V
Current consumption	25 mA ±10% at 24 Vdc
Turn ON / OFF time	8 ms / 5 ms
Protection circuit	Free-wheel diode, Reverse polarity
Connection terminal	2.5 mm ² (spring)
Input channels	1 pluggable
OUTPUT TECHNICAL DATA	
Contact type	mosfet
Output voltage	3...30 Vdc
Nominal current	4 A (3 ... 28 Vdc)
Connection type	2.5 mm ² spring type
GENERAL TECHNICAL DATA	
Operating temperature range	-20...+70°C
Input / output isolation	2.5 kVac / 60 s
Protection degree	IP 20
Overvoltage category / pollution degree	II / 2
Status indication	LED "Input"
Housing material	UL94V-0 plastic material
Dimensions (LxHxD)	6.2x89x77 mm
Approximate weight	35 g
Continuous current	48 A for 10 ms
Mounting information	on a rail, side by side
Leakage current with signal 0	100 µA
Min applicable load	0.02 A
ACCESSORIES	
Mounting rail (IEC60715/TH35-7.5)	PR/3/AC, PR/3/AC/ZB, PR/3/AS, PR/3/AS/ZB
Marking tag	NUPUTUK50
Plugin jumper	CWBK7-0813 (20 poles)
APPROVALS AND MARKINGS	
CE, 	

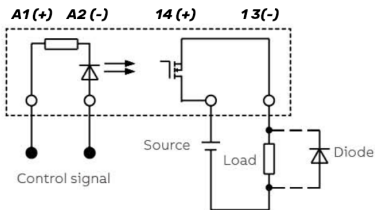

- * Pluggable relay
- * DC input voltage
- * Suitable for DC Load
- * Compact dimensions
- * Available plug-in jumper for potential distribution
- * with spring connection

1 Manufacturer and model of the relay is not binding, technical data are to be considered typical

PRODUCT DESCRIPTION

CWS-024DC/024DC/04 1 solid state relay 12-24Vdc/24Vdc 4A spring, pluggable