
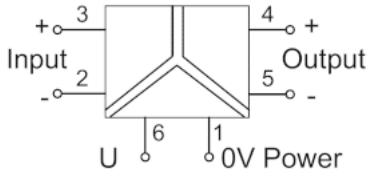




Galvanic isolator 0-20mA/ 0-20mA

| | |
|---|---|
| Series | CON |
| Code | XCONAA534P |
| Type | CON-AA-534P |
| HS code | 85043129 |
| INPUT TECHNICAL DATA | |
| Signal type IN | analogue |
| Input range IN | 0...20 mA |
| OUTPUT TECHNICAL DATA | |
| Signal type OUT | analogue |
| Output range OUT | 0...20 mA |
| Load impedance OUT | 500 Ω |
| Ripple | <20 mV |
| Status indication | LED |
| GENERAL TECHNICAL DATA | |
| Power supply voltage | 24 Vac/dc (19.2...26.4 Vdc / 19.2...26.4 Vac) |
| Accuracy | 0.1% FSR (23°C) |
| Linearity error | 0.05% FSR |
| Temperature coefficient | <150 ppm / K FSR |
| Transmission frequency | 30 Hz 3dB |
| Rise time | 6 ms |
| Operating temperature range | -25...+60°C |
| Insulation | 2.5 kVac / 60 s |
| Insulation type | 3-way (IN / OUT / power) |
| Standard approvals | EN 60947-5-1 |
| Overvoltage category / pollution degree | II / 2 |
| Protection degree | IP 20 |
| Connection terminal IN / OUT | 2.5 mm ² / 2.5 mm ² (push-in) |
| Housing material | UL94V-0 plastic material |
| Dimensions (LxHxD) | 6.2x93x73 mm |
| Approximate weight | 29 g |
| Mounting information | on a rail, side by side |
| ACCESSORIES | |
| Mounting rail (IEC60715/TH35-7.5) | PR/3/AC, PR/3/AC/ZB, PR/3/AS, PR/3/AS/ZB |
| APPROVALS AND MARKINGS | |
| CE,  | |



* Fixed and non-programmable input and output signals* Isolation: 2.5 kVac, 3-way

DESCRIZIONE DEL PRODOTTO

CON-AA-534P Galvanic isolator 0-20mA/ 0-20mA