


Single phase power supply input 120-230Vac / output 24Vdc 3A



Series	Domotic Power
Code	XCSD1072W024VAA
Type	CSD1-072W/024V/AA
HS code	85044083
INPUT TECHNICAL DATA	
Input rated voltage	120-230 Vac
Input voltage AC	85...264 Vac
Input voltage DC	100...370 Vdc (derating U _{in})
Frequency	47...63 Hz
Current consumption	1.17 A (120 Vac) / 0.71 A (230 Vac)
Inrush peak current	15 A
Power factor	> 0.6
Internal protection fuse	T 2 A
External protection on AC line	MT: C-3 A / Fuse: T-3 A
OUTPUT TECHNICAL DATA	
Output voltage range	24 Vdc
Output adjustable range	23.5... 27.5 Vdc
Continuous current	3 A at 55°C
Overload limiting	4.5 A
Ripple @ nominal ratings	50 mVpp
Hold up time	12 ms (120 Vac) / 20 ms (230 Vac)
Status indication	LED "DC OK"
Alarm contact	no
Parallel connection	possible
Redundant parallel connection	possible with external ORing diode
GENERAL TECHNICAL DATA	
Efficiency	89% (230 Vac)
Dissipated power	9.6 W (120 Vac) / 7.9 W (230 Vac)
Operating temperature range	-20...+70°C (derating -2.6 W >55°C)
Input / output isolation	3 kVac / 60 s (SELV output)
Input / ground isolation	class 2, without PE link
Output / ground isolation	class 2 without PE connection
Safety Standard	EN 62368-1, UL508
EMC Standard	EN 61000-6-2, EN 61000-6-3
Overvoltage category / pollution degree	II / 2
Protection degree	IP 20
Connection terminal	2.5 mm ² / 2.5 mm ²
Housing material	UL94V-0 plastic material
Dimensions (LxHxD)	71x62x90 mm
Approximate weight	229 g
Mounting information	vertical on a rail, 10 mm from adjacent components
ACCESSORIES	
Mounting rail (IEC60715/TH35-7.5)	PR/3/AC, PR/3/AC/ZB, PR/3/AS, PR/3/AS/ZB
Mounting rail (IEC60715/TH35-15)	PR/3/PP, PR/3/PP/ZB, PR/3/PA, PR/3/PA/ZB
APPROVALS AND MARKINGS	UL, CE, RoHS

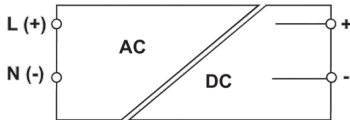

- * Single phase and DC input
- * Short circuit, overload, input and output overvoltage protections
- * Over temperature protection
- * Suitable for standard applications
- * Isolation Class 2, no grounding needed

1 Please refer to the datasheet for more details
2 Above overcurrent limit, the protection starts cycling in ON/OFF mode(hiccup autoreset), the maximum current supplied depends by the line resistance

PRODUCT DESCRIPTION

CSD1-072W/024V/AA Single phase power supply input 120-230Vac / output 24Vdc 3A

Copyright © Cabur srl Sede legale Località isola Grande, 45 – 17041 Altare (SV) – Italia – Tel. 019-589991 – Fax 019-58999233 – E-mail: info@cabur.it

