

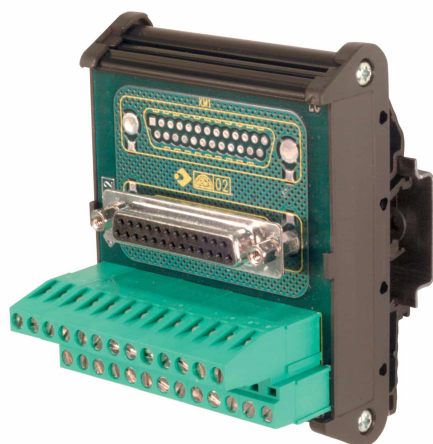




## D-sub interface 25 poles female

|                                         |                                 |
|-----------------------------------------|---------------------------------|
| Series                                  | ISD                             |
| Code                                    | XISD25PF                        |
| Type                                    | ISD25PF                         |
| <b>GENERAL TECHNICAL DATA</b>           |                                 |
| Number of poles                         | 25                              |
| Version                                 | D-sub female                    |
| Input rated voltage                     | 0...25 Vac / 0...60 Vdc         |
| Input rated current                     | 2 A max                         |
| Operating temperature range             | -20...+60°C                     |
| Overvoltage category / pollution degree | II / 2                          |
| Protection degree                       | IP 00                           |
| Connection terminal                     | 2.5 mm <sup>2</sup> screw       |
| Dimensions (LxHxD)                      | 70x66x93 mm                     |
| Housing material                        | UL94V-0 plastic material        |
| Mounting information                    | vertical on rails, side by side |
| <b>ACCESSORIES</b>                      |                                 |
| Mounting rail (IEC60715/TH35-7.5)       | PR003, PR903, PR005, PR911      |
| Mounting rail (IEC60715/TH35-15)        | PR007, PR907, PR006, PR912      |
| APPROVALS AND MARKINGS                  | CE                              |

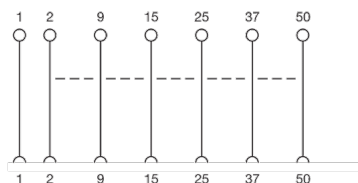

\* Universal module  
1 The terminal number corresponds to the connector number

## DESCRIZIONE DEL PRODOTTO

ISD25PF D-sub interface 25 poles female